

CONVEYCO

(PTY)LTD

PLANNED MOVEMENT

KEEPING YOUR SUPPLY CHAIN ON TRACK

TELESCOPIC EXTEND-A-BELTS®



Telescopic Extend-A-Belts in the Despatch Bay

The Telescopic Extend-A-Belt conveyor is suitable for loading & unloading crates, cartons, bags, drums, rolls and many other products.

Variations on to our standard model include: Hydraulic Elevation, self-propelled & side transfer rails.




Extend-A-Belt Loading into a Truck

SAFE AND EFFICIENT

The system is designed for ease of use little training is needed to operate the conveyor. However, safety is a major consideration in the design of the operation and the components. Nose Cones have been added to the front end of the conveyor and the front control panel is relocated to the side of the unit for increased operator safety.


BENEFITS OF THE EXTEND-A-BELT SYSTEM

- Most efficient means of loading or unloading trucks and containers.
- This robust system is easy to operate.
- Easily integrates with existing systems and practices.
- Enables you to load/unload all trucks and trailers.
- Reduces time and effort during loading/unloading.

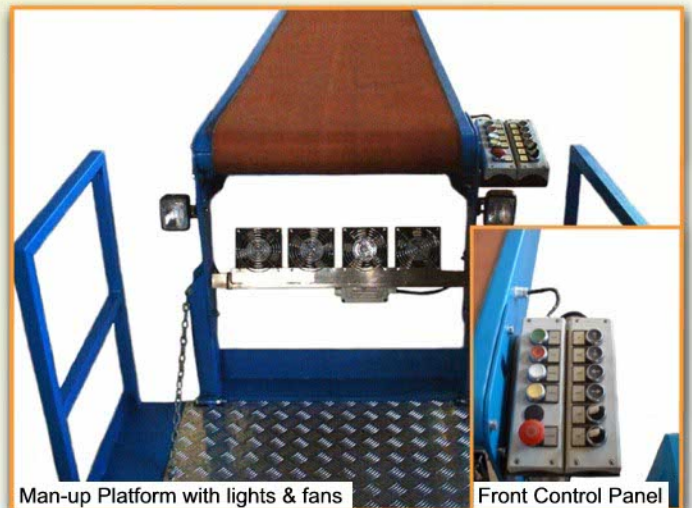

Man-up Platform with lights & fans

Front Control Panel

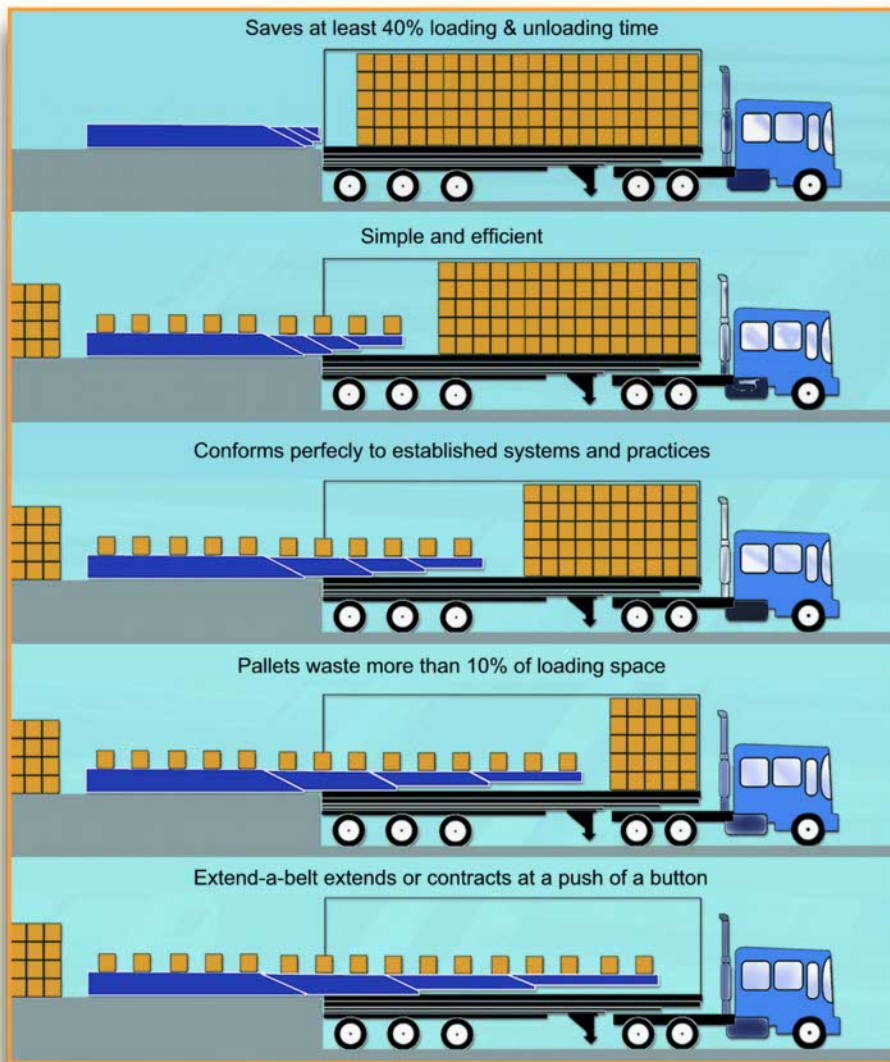

QUALITY COMPONENTS


Central to the integrity and long term success of any conveyor is the specification and quality of the components used. All Conveyco's components and products are designed and manufactured in Conveyco's Cape Town Factory.



Model AAA (14.5m) Extend-A-Belt being Tested



Extend-A-Belt Conveyors in Textile Industry

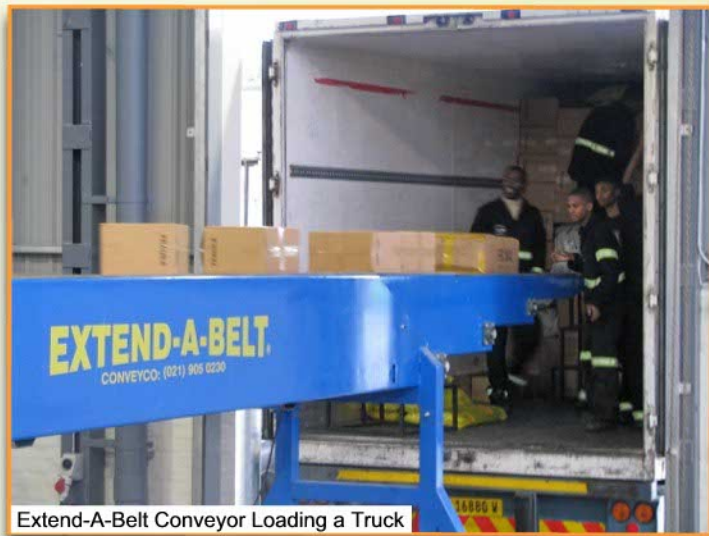

Extend-A-Belt Conveyor Loading a Truck




Extend-A-Belt Conveyor with Operator Platform & Computer Stand



Extend-A-Belt Conveyor on Castor Wheels



Extend-A-Belt Conveyor in Despatch Bay

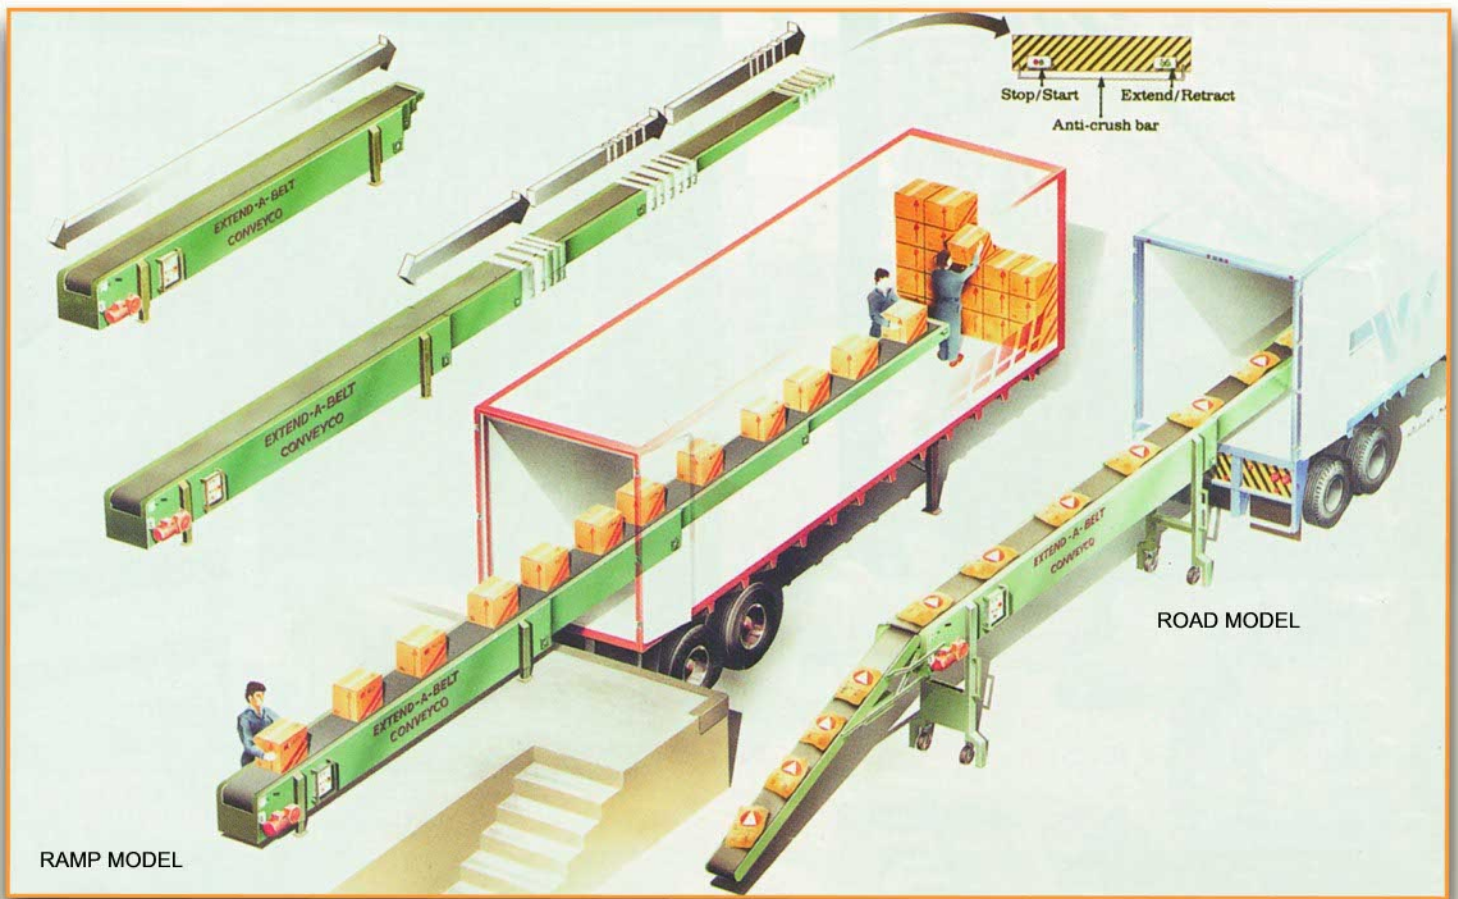

MODEL	CONTRACTED LENGTH	EXTENDED LENGTH	= EXTENSION	STANDARD BELT WIDTH*	NUMBER OF SEGMENTS
AAA	7.5m	22.5m	15m	500mm	5
AA	7.3m	19.3m	12m	500mm	4
A	6.3m	16.3m	10m	500mm	4
B	5.3m	12.3m	7m	500mm	4
C	5.3m	10.3m	5m	500mm	3
D	5.3m	8.8m	3.5m	500mm	2

* Other belt widths are available (600mm, 800mm, 1000mm and 1200mm)

ROAD MODEL

General specification as per the Ramp Model, except for a 3.5m meter Feeder Belt increasing the unit's length. This model is mounted on mobile stands which provide the required working height inside the truck / container.

Model "D" does not have a front control panel and only has one extending segment.

SAFE AND EFFICIENT

The company has vast experience in the South African goods moving industry and the understanding that we have developed with our partners, allows us to handle even the more taxing of problems.

Conveyco (Pty) Ltd

17 Range Road /
PO Box 111
Blackheath
Cape Town
7580

Tel: +27 (0) 21 905 0230
Fax: +27 (0) 21 905 0236
E-mail: neil@conveyco.co.za
Website: www.conveyco.co.za
Registration No. 1959/004758/07



CONVEYCO

(PTY) LTD

PLANNED MOVEMENT
KEEPING YOUR SUPPLY CHAIN ON TRACK